

MODEL #1952 ASSEMBLY INSTRUCTIONS

PATENT # D418,998

PARTS LIST

PART-#	QUANTITY	DESCRIPTION
A	3	Wire Basket
B	4	46-1/2" Long Leg/Tube
C	12	Long Carriage Bolt
D	12	Short Carriage Bolt
E	24	Cap Nut
F	12	Sleeve
G	1	Wrench

CAUTION: It is important that you follow the drawing (See Figure 1) when positioning the baskets onto the legs/tubes. Each leg has 6 holes. Please note that the top of each leg is the end with the hole about one inch from the top of the tube, and the bottom of each leg is the end with the hole about 7-3/4 inches from the bottom of the tube.

Step 1 – Attach the three baskets (A) to two of the legs/tubes (B) (See Figure 2)

A. With 4 cap nuts (E), 2 short bolts (D), 2 long bolts (C) and 2 sleeves (F), attach a basket to the top of two legs.

The long bolts are for the bottom corner holes of each basket. The long bolts must be inserted from the inside of the basket, first through the corner basket hole, and then through the sleeve, and lastly through the hole in the leg. Secure (BUT DON'T TIGHTEN) with a cap nut.

The short bolts are for the top corner holes of each basket. The short bolts must be inserted from the inside of the basket, first through the corner basket hole, and then through the top hole of the leg. Secure (BUT DON'T TIGHTEN) with a cap nut.

B. Repeat the above procedure for the second and third basket. (See Figure 2)

Step 2 – With the remaining bolts, cap nuts and sleeves, attach the last two legs to the remaining corners of the baskets. (See Figure 3)

Step 3 – After all bolts and cap nuts are assembled, securely tighten with wrench (G).

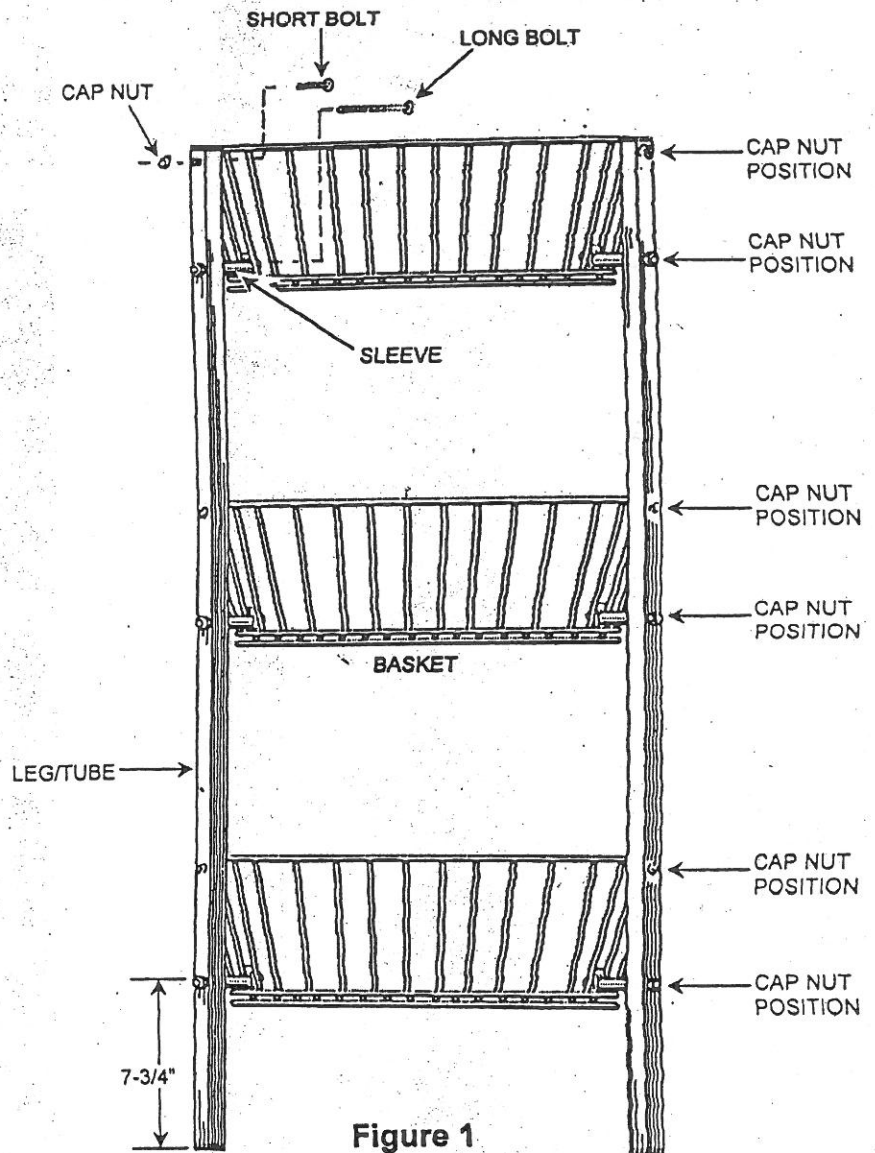


Figure 1

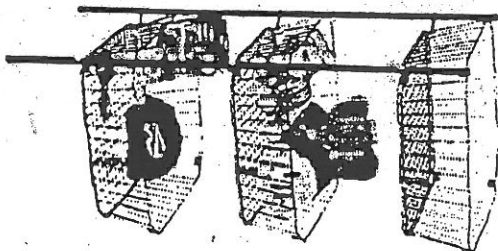


Figure 2

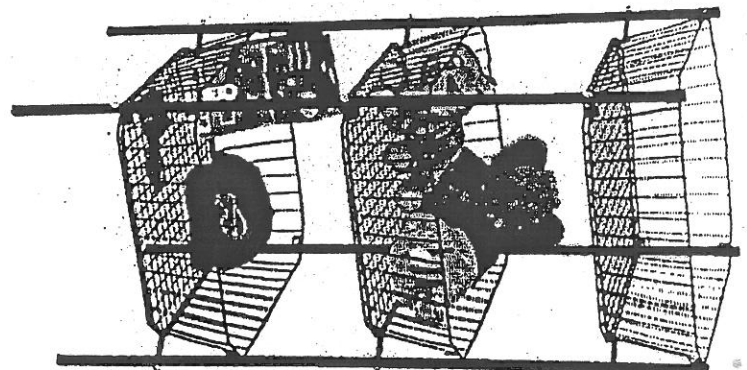


Figure 3